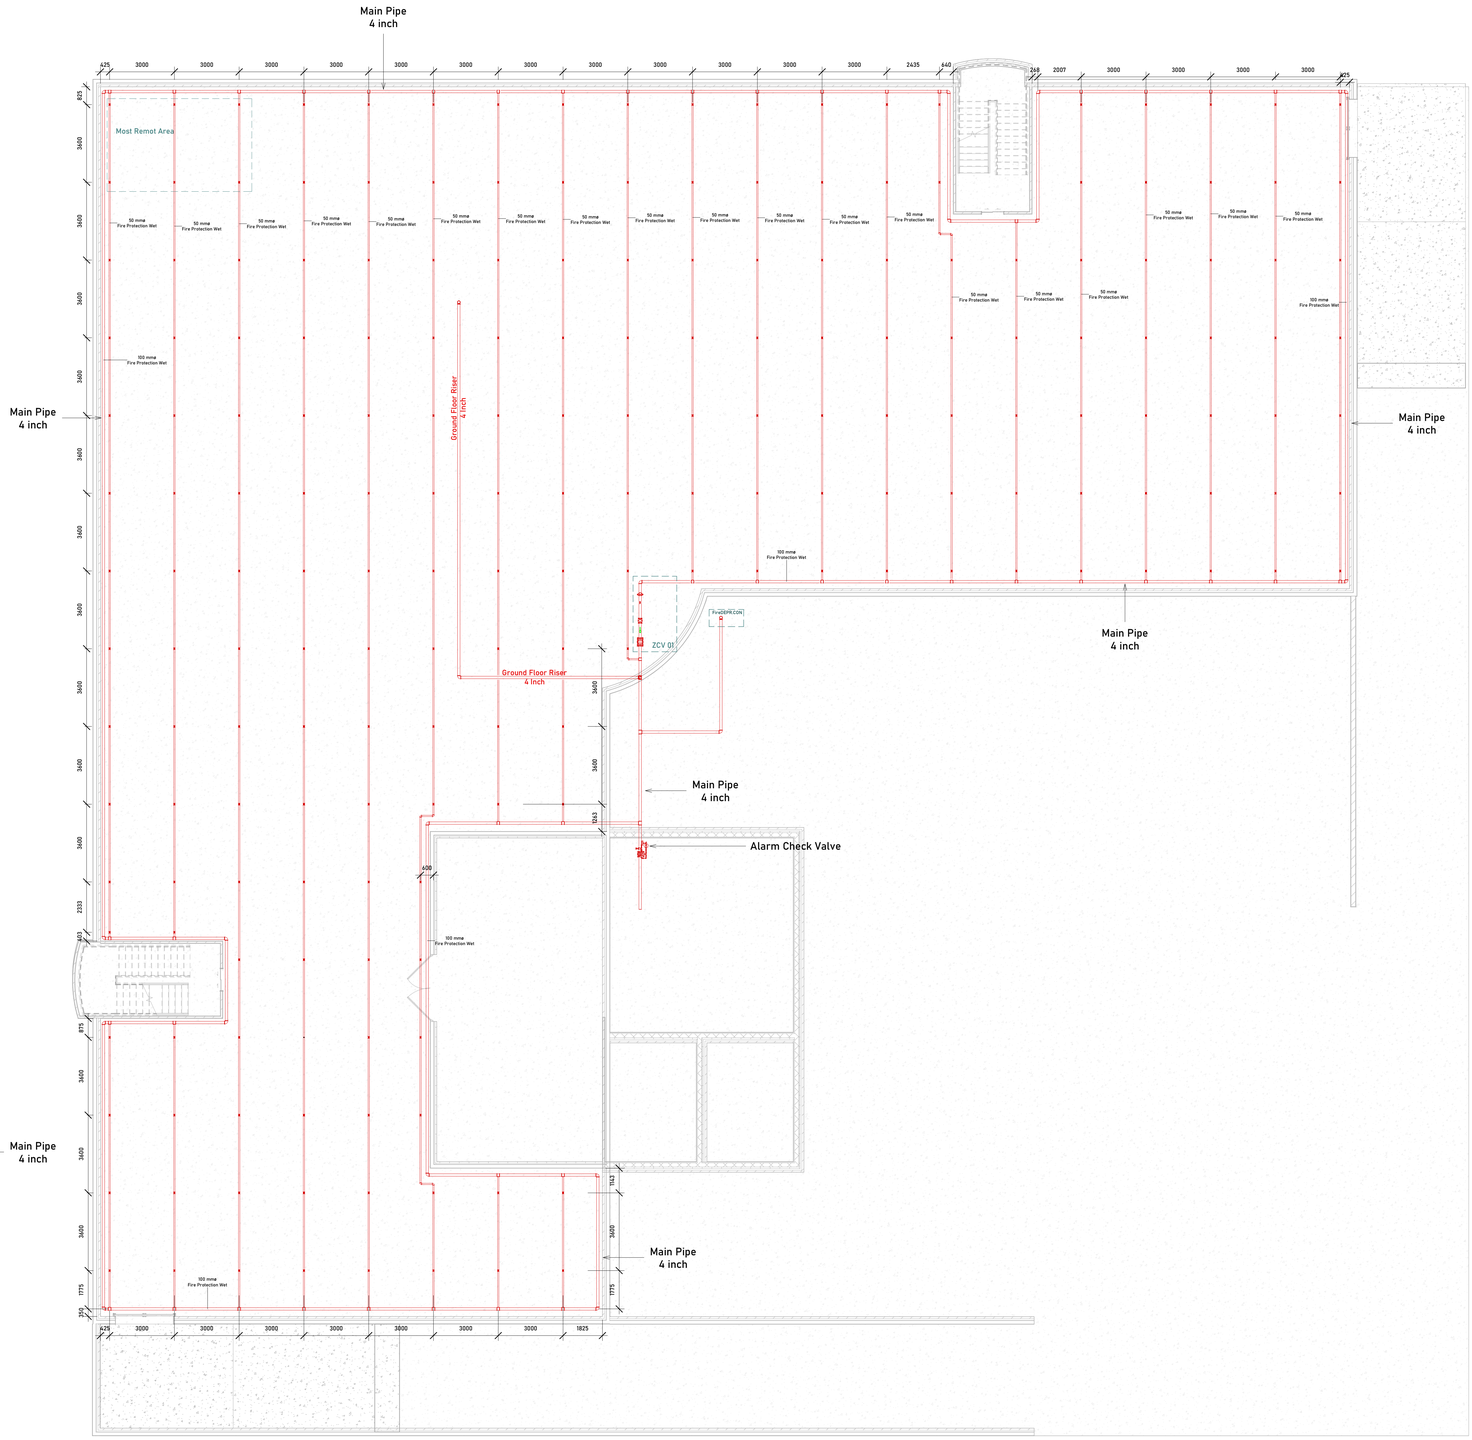

1 Basement Sprinkler Network
1 : 100

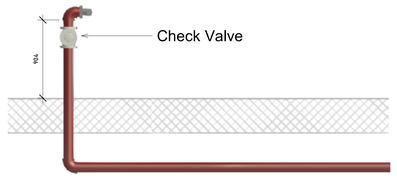

2 Fire Department Connectioin
1 : 25

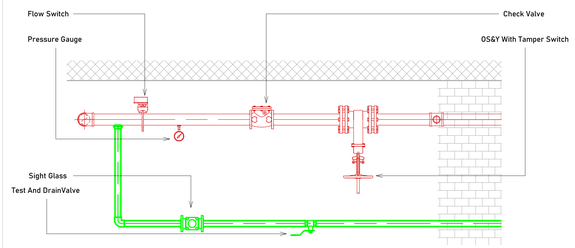

3 ZCV 01
1 : 22

- Sprinkler Calaulations :

No.Sprinkler Per Branch = $(1.2xA^{0.5})/S = (1.2 \times 140^{0.50})/3 = 5$ Nearly to 6 sprinklers

A= 1500 ft^2 S= 3 m

Table 23.7.3.4 Ordinary Hazard Pipe Schedule

Steel		Copper	
1 in. (25 mm)	2 sprinklers	1 in. (25 mm)	2 sprinklers
1¼ in. (32 mm)	3 sprinklers	1¼ in. (32 mm)	3 sprinklers
1½ in. (40 mm)	5 sprinklers	1½ in. (40 mm)	5 sprinklers
2 in. (50 mm)	10 sprinklers	2 in. (50 mm)	12 sprinklers
2½ in. (65 mm)	20 sprinklers	2½ in. (65 mm)	25 sprinklers
3 in. (80 mm)	40 sprinklers	3 in. (80 mm)	45 sprinklers
3½ in. (90 mm)	65 sprinklers	3½ in. (90 mm)	75 sprinklers
4 in. (100 mm)	100 sprinklers	4 in. (100 mm)	115 sprinklers
5 in. (125 mm)	160 sprinklers	5 in. (125 mm)	180 sprinklers
6 in. (150 mm)	275 sprinklers	6 in. (150 mm)	300 sprinklers
8 in. (200 mm)	See Section 8.2	8 in. (200 mm)	See Section 8.2

From table Branch Diameter = 50 mm

MOHAMED HADHOUD

KEY PLAN:



LEGEND:

	Fire Extinguisher		Fire Alarm
	Total Flooding System		Side Wall Sprinkeler
	Ball Valve		OS&Y Valve
	Pressure Gauge		Flow Switch
	Air Vent		Check Valve
	Sight Glass		Pendant Sprinkler

Rev	Date	Detail	Made	Chk'd	App'd

constractor:
Engineer's Company for Electromechanical Works

Consultant :
ASEC For ElectroMechanical

Project :
Menofia Hospital

Title :
Basement Sprinkler Network

Eng :	M.Hadhoud	CAD :	ENGX
Chk'd :	Hassan Salah	App'd :	ENGX
Date :	Issue Date	Scale :	As indicated

Drg. No. 04 Rev:

cm A0